

RLX-series

**/// BRAVILOR
BONAMAT**



Buffet

The taste of quality worldwide



Delicious fresh filter coffee, permanently accessible! Plus the added benefit of a hot water tap for tea, soup or other hot beverages and a machine combination featuring a steam tap. The wide range of Bravilor Bonamat buffet machines can be purchased in a variety of combinations so equipment can be tailored to exactly suit its location and the required specification. The modern appearance of the RLX-series makes it ideal for any location where beverage equipment will be in sight. In short, the perfect machine for your coffee counter, bar or buffet.



The hot water module RLX 3 or hot water/-steam module RLX 4 are easy to place next to your existing coffee-making machine.



RLX-series highlighted

- Delicious fresh filter coffee
- Separate hot water or hot water/steam unit
- User friendly and low maintenance
- "Coffee-is-ready" signal and descaling signal
- Stainless steel filterpan and housing for a robust and quality appearance
- Connection to the mains water supply
- Total counters in coffee-making and hot water sections
- Digital display with touch-button control
- For every location a perfect combination


Models RLX-series

The RLX-series offers three kinds of brewing systems: dispensing into either glass decanters, airpots or fixed containers. Thanks to the self regulating hot plates, the containers and the special Bravilor Bonamat airpots, a consistently high quality of beverage is maintained for you to serve. Depending on the quantity of coffee you require, the machines are equipped with one or two brewing systems. A hot water section and hot water/steam section complete the series. The water out of this unit is boiled so serving a delicious, clear cup of tea is guaranteed.

Model	Design
RLX-series with glass decanters (1,7 litres)	
RLX 31	1 brewing system, 1 hot plate, hot water section
RLX 131	2 brewing systems, 2 hot plates, hot water section
RLX 41	1 brewing system, 1 hot plate, hot water/steam section
RLX-series with containers (2 litres)	
RLX 75	1 brewing system, hot water section
RLX 575	2 brewing systems, hot water section
RLX 585	2 brewing systems, hot water/steam section
RLX 5	1 brewing system
RLX 55	2 brewing systems
RLX-series with airpot (2,2 litres)	
RLX 76	1 brewing system, hot water section
RLX 676	2 brewing systems, hot water section
RLX-series hot water (steam) modules	
RLX 3	hot water section
RLX 4	hot water/steam section



The specially designed Bravilor Bonamat glass, stainless steel and 'Durabel' shatterproof decanters.

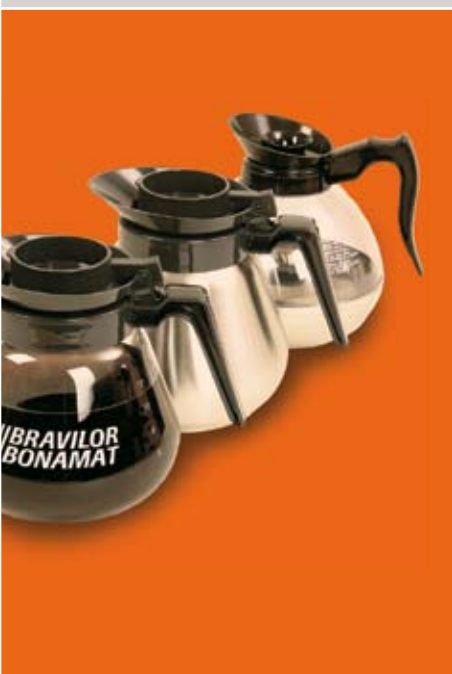

RLX-series with glass decanters

Technical details	RLX 31	RLX 131	RLX 41
Coffee-making section			
Holding capacity (litres / cups)	1,7 / 12	3,4 / 24	1,7 / 12
Throughput per hour (litres / cups)			
230V ~ 50/60Hz	approx. 15 / 120	-	approx. 15 / 120
400V ~ 3N 50/60Hz	approx. 15 / 120	approx. 30 / 240	approx. 15 / 120
Brewing time (minutes / decanter)			
230V ~ 50/60Hz	approx. 6 / 1	-	approx. 6 / 1
400V ~ 3N 50/60Hz	approx. 6 / 1	approx. 6 / 2	approx. 6 / 1
Hot water/steam section			
Holding capacity (litres)	1,8	1,8	1,5
Throughput per hour (litres)			
230V ~ 50/60Hz	approx. 18	-	approx. 25
400V ~ 3N 50/60Hz	approx. 18	approx. 18	approx. 25
Rated power			
230V ~ 50/60Hz	2080W	-	2880W
400V ~ 3N 50/60Hz	3990W	6070W	4095W
Dimensions (wxdxh / mm)	475x509x448	705x509x448	475x509x448

RLX-series



The Bravoril Bonamat airport Furento keeps your coffee fresh until you want it, so you can enjoy freshly brewed coffee anytime and anywhere you like, right down to the last cup.



RLX-series with containers

Technical details	RLX 75	RLX 575	RLX 585	RLX 5	RLX 55
Coffee-making section					
Holding capacity (litres / cups)	2 / 16	4 / 32	4 / 32	2 / 16	4 / 32
Throughput per hour (litres / cups)					
230V ~ 50/60Hz	approx. 13 / 105	-	-	approx. 13 / 105	approx. 17 / 135
400V ~ 3N 50/60Hz	approx. 13 / 105	approx. 26 / 210	approx. 26 / 210	-	approx. 26 / 210
Brewing time (minutes / container)					
230V ~ 50/60Hz	approx. 7 / 1	-	-	approx. 7 / 1	approx. 7 / 2
400V ~ 3N 50/60Hz	approx. 7 / 1	approx. 7 / 2	approx. 7 / 2	-	approx. 7 / 2
Hot water/steam section					
Holding capacity (litres)	1,8	1,8	1,5	-	-
Throughput per hour (litres)					
230V ~ 50/60Hz	approx. 18	-	-	-	-
400V ~ 3N 50/60Hz	approx. 18	approx. 18	approx. 25	-	-
Rated power					
230V ~ 50/60Hz	2065W	-	-	2065W	2065W
400V ~ 3N 50/60Hz	3975W	6040W	7010W	-	4130W
Dimensions (wxdxh / mm)	475x509x611	705x509x611	705x509x611	245x509x611	475x509x611

Options RLX-series

- Decanters, airpots and vacuum flasks available separately
- Cup heater (WHK)
- HP-RLX: self-regulating hotplates that can be used independently of the coffee maker, can also be placed on top of the module
- Stainless steel tea filter pan is available for brewing tea
- Swivel outlet for filling decanters



Cup heater WHK heats cups and mugs so the beverage remains hot for a longer time after serving it.
Capacity: approx. 96 cups.



RLX-series hot water (steam) modules

Technical details	RLX 3	RLX 4
Hot water (steam) section		
Holding capacity (litres)	1,8	1,5
Throughput per hour (liters)		
230V~ 50/60Hz	approx. 18	approx. 25
Rated power		
230V~ 50/60Hz	1910W	2880W
Dimensions (wxdxh / mm)	245x509x448	245x509x448

RLX-series with airpots

Technical details	RLX 76	RLX 676
Coffee-making section		
Capacity (litres)	1 airpot (2,2)	2 airpots (4,4)
Throughput per hour (litres / cups)		
230V~ 50/60Hz	approx. 15 / 120	-
400V~ 3N 50/60Hz	approx. 15 / 120	approx. 30 / 240
Brewing time (minutes / airpot)		
230V~ 50/60Hz	approx. 7 / 1	-
400V~ 3N 50/60Hz	approx. 7 / 1	approx. 7 / 2
Hot water section		
Holding capacity (litres)	1,8	1,8
Throughput per hour (liters)		
230V~ 50/60Hz	approx. 18	-
400V~ 3N 50/60Hz	approx. 18	approx. 18
Rated power		
230V~ 50/60Hz	2015W	-
400V~ 3N 50/60Hz	3925W	5940W
Dimensions (wxdxh / mm)	475x509x611	705x509x611

We advise the use of:

- Bravilor Bonamat filter papers for delicious coffee
- Renegite for descaling
- Cleaner for thorough cleaning

/// BRAVILOR BONAMAT



Your Bravilor Bonamat dealer

Alterations reserved
904.133.004

www.bravilor.com

The taste of quality worldwide